


# modular movement joint

Synthetic material movement joint designed to subdivide a tiled bay area into smaller sections. The layer may utilize one or more connecting extension pieces so as to match higher mortar bedding. This joint is recommended solely for pedestrian transit as it offers limited protection to the tile edges.

Conceived to compensate only slight compression and sliding movements at the screed-substrate level.

Illustrated scale dimension 1:1

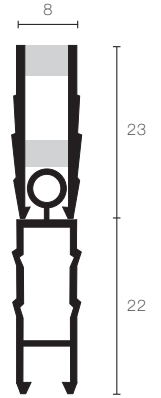


## coflex™ CD

### INSTALLATION:

- Align and position the joint profile in screed cut/joint so that it protrudes slightly above the screed level.
- Proceed with tiling as normal.
- Complete the covering installation job by levelling the joint profile down until its solidly imbedded and flush with the tile edge.
- Grout over the covering including the small gaps between the tiles and joint.

Typical project: retail shops, shopping centres, leisure areas such as Hotels, Gymnasiums.

Suggested flooring bays 16 m<sup>2</sup>

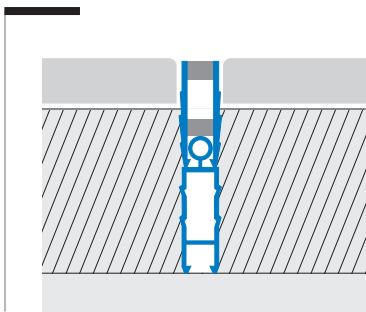

### COFLEX CD-P\* Co-Extruded Synthetic Resin

PVC profile with fair tolerance against main diluted chemical agents present in detergents. Applicable both indoors and outdoors. Upon request, grey mid section insert available: Code P 23.

Material: PVC

Length: 2,70 metres

H=mm

Colour

Art.

23

Grey + transparent

CD 230 P 10

22

extension

CD 220 P