






KERAJOLLY profiles are utilized to define the sharp external wall corners during tile laying. They protect the more fragile single firing tile edges or borders. KERAJOLLY allows the layer to execute his work rapidly and precisely with the only task of choosing the proper size of the profile in respect to the thickness of the tile.

kerajolly™ KJ



(TR 100* - KS 100*)

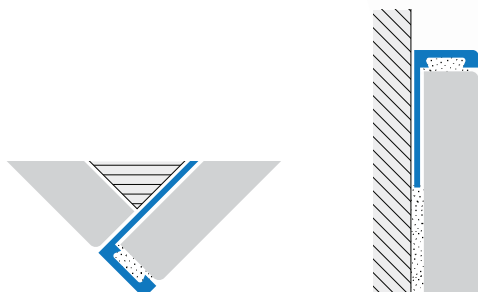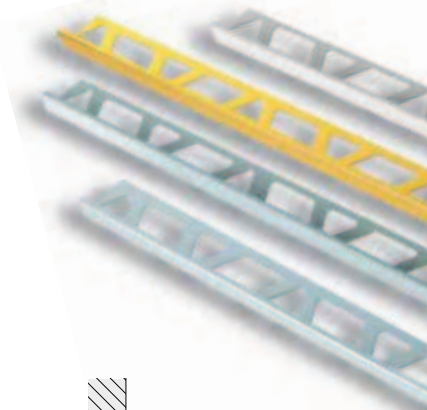

KERAJOLLY TR-I* Stainless steel AISI 304 - DIN 1.4301 e AISI 316

Stainless steel is the best product to ensure resistance against corrosion and for hygienic purposes. The choice of the AISI 316 quality is most appropriate for salty environments or swimming pools.

Available in top-brushed effect finish, code IS.

Available in polished stainless steel (IL), brushed (IS) or sanded (IX).

| | H=mm | | Art. | | |
|---|------|----|------|--------------|---|
| Material: Stainless steel AISI 304 | 4,5 | TR | 45 | IL/IS | ☒ |
| Stainless steel AISI 316 (ILM) | 6 | TR | 60 | IL/IS/ILM | |
| Finish: Polished (IL), Brushed(IS), Sanded (IX) | 8 | TR | 80 | IL/IS/ILM | |
| | 10 | TR | 100 | IL/IS/IX/ILM | |
| | 12,5 | TR | 125 | IL/IS/IX/ILM | |
| Length: 2,70 metres | | | | | |
| ☒ "thin" line | | | | | |

KERAJOLLY TR-KJ A*Silver Anodised Aluminium

A silver (TR/AS) coated aluminium profile which offers an adequate corner edge protection. Granting protection against the aluminium corrosive agents.

The surface of this anodised aluminium profile has been chrome (KJ**ASB) or gold-effect (KJ**ADB) treated in order to give that sparkling effect in combination with bathroom ware. It holds the same properties as the other aluminium models.

| | | | | | | | | |
|--|------|----|-----|----|----|-----|---------|---|
| Material: | 2 | TR | 20 | AS | KJ | | | ☒ |
| Extruded anodised aluminium | 3 | TR | 30 | AS | KJ | | | |
| Finish: Silver (AS), Polished chrome (ASB), Bright polished gold (AOB) | 4,5 | TR | 45 | AS | KJ | | | |
| | 6 | TR | 60 | AS | KJ | 60 | ASB/AOB | |
| | 8 | TR | 80 | AS | KJ | 80 | ASB/AOB | |
| Length: 2,70 metres | 10 | TR | 100 | AS | KJ | 100 | ASB/AOB | |
| | 12,5 | TR | 125 | AS | KJ | 125 | ASB/AOB | |
| ☒ "thin" line | | | | | | | | |



KERAJOLLY profiles protect ceramic tiled wall corners against impact while allowing the decorator to blend in with the colour combination, thanks to the extensive colour variety. Furthermore, one can match the different colours available with the **LISTEC** listello. **KERAJOLLY** ensures the least visible trimming but still guaranteeing the safety and endurance characteristics which are expected in a laying job.

KERAJOLLY KJ-A* Powder Coated Aluminium

This aluminium profile is lacquered with polyester powder base varnish paint in order to guarantee tolerance against main domestic cleaning products and atmospheric agents as well as UV rays. The profiles perform in endurance and elasticity for one may find a not so straight wall during the installation. The profile is entirely varnished also within its cavity.

| | Colour | H=6mm | | | H=8mm | | | | |
|--------------------------------------|------------------|-------|----|---|-------|----|----|---|----|
| Material: Powder coated aluminium | 11= Pure white | KJ | 60 | A | 11 | KJ | 80 | A | 11 |
| | 12= White | KJ | 60 | A | 12 | KJ | 80 | A | 12 |
| | 21= Light grey | KJ | 60 | A | 21 | KJ | 80 | A | 21 |
| | 22= Grey | KJ | 60 | A | 22 | KJ | 80 | A | 22 |
| | 23= Cement grey | KJ | 60 | A | 23 | KJ | 80 | A | 23 |
| | 31= Bahama beige | KJ | 60 | A | 31 | KJ | 80 | A | 31 |
| | 32= Dark beige | KJ | 60 | A | 32 | KJ | 80 | A | 32 |
| | 41= Cream | KJ | 60 | A | 41 | KJ | 80 | A | 41 |
| | 42= Ivory | KJ | 60 | A | 42 | KJ | 80 | A | 42 |
| | 51= Black | KJ | 60 | A | 51 | KJ | 80 | A | 51 |
| Length: 2,70 metres | | | | | | | | | |

| | Colour | H=10mm | | | H=12,5mm | | | | |
|--------------------------------------|------------------|--------|-----|---|----------|----|-----|---|----|
| Material: Powder coated aluminium | 11= Pure white | KJ | 100 | A | 11 | KJ | 125 | A | 11 |
| | 12= White | KJ | 100 | A | 12 | KJ | 125 | A | 12 |
| | 21= Light grey | KJ | 100 | A | 21 | KJ | 125 | A | 21 |
| | 22= Grey | KJ | 100 | A | 22 | KJ | 125 | A | 22 |
| | 23= Cement grey | KJ | 100 | A | 23 | KJ | 125 | A | 23 |
| | 31= Bahama beige | KJ | 100 | A | 31 | KJ | 125 | A | 31 |
| | 32= Dark beige | KJ | 100 | A | 32 | KJ | 125 | A | 32 |
| | 41= Cream | KJ | 100 | A | 41 | KJ | 125 | A | 41 |
| | 42= Ivory | KJ | 100 | A | 42 | KJ | 125 | A | 42 |
| | 51= Black | KJ | 100 | A | 51 | KJ | 125 | A | 51 |
| Length: 2,70 metres | | | | | | | | | |

KERAJOLLY KJ-P* Full body coloured Synthetic Resin

The product is entirely of a solid colour compound and not colour coated. The profile is available in a wide range of colours and can be utilized in the most diverse environments which require coverings. This type of trim profile is easy to cut to size so the laying may result quicker and less time consuming therefore one would economize in terms of labour over the entire project budget.

Again this product maintains a good performance over time against UV rays and small scratches are not so visible, tolerates impact and chemicals present in most detergents.

| | Colour | H=6mm | | | H=8mm | | | | |
|------------------------|------------------|-------|----|---|-------|----|----|---|----|
| Material: Resintop | 11= Pure white | KJ | 60 | P | 11 | KJ | 80 | P | 11 |
| | 12= White | KJ | 60 | P | 12 | KJ | 80 | P | 12 |
| | 21= Light grey | KJ | 60 | P | 21 | KJ | 80 | P | 21 |
| | 22= Grey | KJ | 60 | P | 22 | KJ | 80 | P | 22 |
| | 23= Cement grey | KJ | 60 | P | 23 | KJ | 80 | P | 23 |
| | 31= Bahama beige | KJ | 60 | P | 31 | KJ | 80 | P | 31 |
| | 32= Dark beige | KJ | 60 | P | 32 | KJ | 80 | P | 32 |
| | 41= Cream | KJ | 60 | P | 41 | KJ | 80 | P | 41 |
| | 42= Ivory | KJ | 60 | P | 42 | KJ | 80 | P | 42 |
| | 51= Black | KJ | 60 | P | 51 | KJ | 80 | P | 51 |
| Length: 2,70 metres | | | | | | | | | |

| | Colour | H=10mm | | | H=12,5mm | | | | |
|------------------------|------------------|--------|-----|---|----------|----|-----|---|----|
| Material: Resintop | 11= Pure white | KJ | 100 | P | 11 | KJ | 125 | P | 11 |
| | 12= White | KJ | 100 | P | 12 | KJ | 125 | P | 12 |
| | 21= Light grey | KJ | 100 | P | 21 | KJ | 125 | P | 21 |
| | 22= Grey | KJ | 100 | P | 22 | KJ | 125 | P | 22 |
| | 23= Cement grey | KJ | 100 | P | 23 | KJ | 125 | P | 23 |
| | 31= Bahama beige | KJ | 100 | P | 31 | KJ | 125 | P | 31 |
| | 32= Dark beige | KJ | 100 | P | 32 | KJ | 125 | P | 32 |
| | 41= Cream | KJ | 100 | P | 41 | KJ | 125 | P | 41 |
| | 42= Ivory | KJ | 100 | P | 42 | KJ | 125 | P | 42 |
| | 51= Black | KJ | 100 | P | 51 | KJ | 125 | P | 51 |
| Length: 2,70 metres | | | | | | | | | |

KERAJOLLY KJ-OC Chromed Brass

Brass profile with top chrome finishing effect (OC). Resistant to humidity and corrosion. Great visual impact and good tolerance to mechanical stress. This profile is highly suitable to match with bathroom accessories.

| | H=mm | Art. | | |
|--|------|------|-----|----|
| Material: Chromed Brass Extruded | 6 | KJ | 60 | OC |
| | 8 | KJ | 80 | OC |
| | 10 | KJ | 100 | OC |
| | 12,5 | KJ | 125 | OC |
| Length: 2,70 metres | | | | |