


trimtec™ SR


TRIMTEC SR is recommended in particular for finishing the edges of the perimeter of the ceramic floors, especially where they abut to vertical covering, or as stair nosing, as well as for trimming external access ways and balconies. SR trim has an extended vertical edge which serves to better cover and protect the joining surfaces or paint finishing as well as to prevent future fissuring.

Its particular section design makes it suitable to match two different floor thicknesses with the same reversible profile.

Vertical dovetail anchorage.




Stainless Steel section



Aluminium Section

(SR 8/15*)

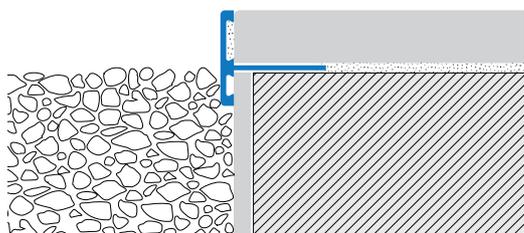

TRIMTEC SR-O* Extruded Brass

This brass profile is developed with prime choice raw material in order to guarantee tolerance and endurance to chemical and mechanical solicitations. Through contact with moisture or corrosive media, brass may oxidize on exposed surfaces. This situation can be easily solved by buffing the product with to conventional polisher to return to its original shine. Disponibile con superficie Natural (ON) a Polished (OL).

TRIMTEC SR-AS Silver anodised aluminium

This profile has to silver coating and is suitable for both indoor or outdoor application with high tolerance to weather agents but less to mechanical impact. During installation, excess adhesive and grout should be removed immediately to avoid stains. The exposed surface may change colour or darken in time. Where higher stresses are involved the use of brass profiles is recommended o Stainless Steel.

TRIMTEC SR-I* Stainless Steel AISI 304 - DIN 1.4301

This stainless steel profile is AISI 304 standard which ensures high tolerance to most of diluted chemicals found in laboratories or strong detergents present in food processing plants, commercial kitchens, slaughter houses, breweries, hospitals, public toilets etc. Disponibile con superficie Polished (IL) a Brushed (IS).

CURVELINE

TRIMTEC SR series are also available with to special cut flange so they become formable for curved edges and inlays. To order: add the letter D to the product code.

	H=mm		Art.	
Material: Extruded Brass	8/15 10/12,5	SR SR	8/15 10/12	ON/OL ON/OL
Finish*: Natural (ON), Polished(OL)				
Length: 2,70 metres				

Material: Extruded Anodised aluminium	8/15 10/12,5	SR SR	8/15 10/12	AS AS
Finish: Silver (AS)				
Length: 2,70 metres				

Material: Stainless Steel AISI 304	8/15 10/12,5	SR SR	8/15 10/12	IL/IS IL/IS
Finish*: Polished(IL), Brushed (IS)				
Length: 2,70 metres				



